

# CE-AX Series

Low Impedance





- 105°C, 1,000 to 2,000hrs.
- Solvent proof (within 2 minutes)

## Specifications

| Items                              | Condition                                                   |                                                                                                | Specifications                                              |      |      |      |      |      |
|------------------------------------|-------------------------------------------------------------|------------------------------------------------------------------------------------------------|-------------------------------------------------------------|------|------|------|------|------|
| Rated voltage (V)                  | —                                                           |                                                                                                | 6.3                                                         | 10   | 16   | 25   | 35   | 50   |
| Surge voltage (V)                  | Room temperature                                            |                                                                                                | 8.0                                                         | 13   | 20   | 32   | 44   | 63   |
| Category temperature range (°C)    | —                                                           |                                                                                                | -55 to +105                                                 |      |      |      |      |      |
| Capacitance tolerance (%)          | 120Hz/20°C                                                  |                                                                                                | M : ±20                                                     |      |      |      |      |      |
| Dissipation Factor (tan δ)         | 120Hz/20°C                                                  | φ 4 to φ 6.3                                                                                   | 0.24                                                        | 0.20 | 0.16 | 0.14 | 0.12 | 0.12 |
|                                    |                                                             | φ 8 to φ 16                                                                                    | 0.28                                                        | 0.24 | 0.20 | 0.16 | 0.14 | 0.14 |
|                                    |                                                             | When rated capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. |                                                             |      |      |      |      |      |
| Leakage current (LC)               | μA/after 2minutes (max)                                     |                                                                                                | The greater value of either 0.01CV or 3                     |      |      |      |      |      |
| Impedance ratio at low temperature | Based the value at 120Hz, +20°C                             | -40°C Z/Z <sub>20°C</sub>                                                                      | 3                                                           | 2    | 2    | 2    | 2    | 2    |
|                                    |                                                             | -55°C Z/Z <sub>20°C</sub>                                                                      | 5                                                           | 4    | 4    | 3    | 3    | 3    |
| Endurance                          | 105°C rated voltage applied (With the rated ripple current) | Test                                                                                           | φ 4 to φ 6.3, φ 10×7.7 : 1,000hrs., φ 8 to φ 16 : 2,000hrs. |      |      |      |      |      |
|                                    |                                                             | ΔC/C                                                                                           | Within ±25% of the initial value                            |      |      |      |      |      |
|                                    |                                                             | tan δ                                                                                          | ≤ 2 times the initial specified value                       |      |      |      |      |      |
|                                    |                                                             | LC                                                                                             | ≤ The initial specified value                               |      |      |      |      |      |

## Marking, Dimensions

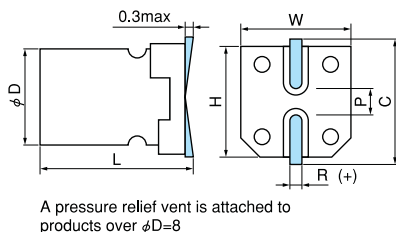

(Unit : mm)

| D <sup>+0.5max</sup> | L <sup>±0.3</sup>    | W <sup>±0.2</sup> | H <sup>±0.2</sup> | C <sup>±0.2</sup> | R          | P <sup>±0.2</sup> |
|----------------------|----------------------|-------------------|-------------------|-------------------|------------|-------------------|
| 4                    | 6.0                  | 4.3               | 4.3               | 5.0               | 0.5 to 0.8 | 1.0               |
| 5                    | 6.0                  | 5.3               | 5.3               | 6.0               | 0.5 to 0.8 | 1.4               |
| 6.3                  | 6.0                  | 6.6               | 6.6               | 7.3               | 0.5 to 0.8 | 2.2               |
| 6.3                  | 7.7                  | 6.6               | 6.6               | 7.3               | 0.5 to 0.8 | 2.2               |
| 8                    | 10.2                 | 8.3               | 8.3               | 9.0               | 0.7 to 1.0 | 3.2               |
| 10                   | 7.7                  | 10.3              | 10.3              | 11.0              | 1.0 to 1.4 | 4.6               |
| 10                   | 10.2                 | 10.3              | 10.3              | 11.0              | 1.0 to 1.4 | 4.6               |
| 12.5                 | 13.5 <sup>±0.5</sup> | 12.8              | 12.8              | 13.5              | 1.0 to 1.4 | 4.6               |
| 16                   | 16.5 <sup>±0.5</sup> | 16.3              | 16.3              | 17.3              | 1.7 to 2.1 | 7.0               |

■ Size List, Impedance, Rated Ripple Current




| $\mu F$ \ V | 6.3       |       |      | 10        |       |      | 16        |       |      | 25        |       |      | 35        |       |      | 50        |       |     |
|-------------|-----------|-------|------|-----------|-------|------|-----------|-------|------|-----------|-------|------|-----------|-------|------|-----------|-------|-----|
| 4.7         |           |       |      |           |       |      |           |       |      |           |       |      | 4x6.0     | 1.80  | 80   | 4x6.0     | 2.90  | 60  |
| 10          |           |       |      |           |       |      |           |       |      | 4x6.0     | 1.80  | 80   | 5x6.0     | 0.76  | 150  | 6.3x6.0   | 0.88  | 165 |
| 15          |           |       |      |           |       |      | 4x6.0     | 1.80  | 80   | 5x6.0     | 0.76  | 150  | 5x6.0     | 0.76  | 150  |           |       |     |
| 22          |           |       |      | 4x6.0     | 1.80  | 80   | 5x6.0     | 0.76  | 150  | 5x6.0     | 0.76  | 150  | 5x6.0     | 0.76  | 150  | 6.3x6.0   | 0.88  | 165 |
| 27          | 4x6.0     | 1.80  | 80   |           |       |      |           |       |      |           |       |      |           |       |      |           |       |     |
| 33          | →         |       |      | 5x6.0     | 0.76  | 150  | →         |       |      | 6.3x6.0   | 0.44  | 230  | 6.3x6.0   | 0.44  | 230  | 6.3x7.7   | 0.68  | 195 |
| 47          | 5x6.0     | 0.76  | 150  | →         |       |      | 6.3x6.0   | 0.44  | 230  | 6.3x6.0   | 0.44  | 230  | 6.3x6.0   | 0.44  | 230  | 6.3x7.7   | 0.68  | 195 |
| 56          | 5x6.0     | 0.76  | 150  |           |       |      |           |       |      | 6.3x6.0   | 0.44  | 230  |           |       |      |           |       |     |
| 68          | →         |       |      | 6.3x6.0   | 0.44  | 230  | 6.3x6.0   | 0.44  | 230  | 6.3x6.0   | 0.44  | 230  | 6.3x7.7   | 0.34  | 280  |           |       |     |
| 100         | 6.3x6.0   | 0.44  | 230  | →         |       |      | 6.3x6.0   | 0.44  | 230  | 6.3x7.7   | 0.34  | 280  | 8x10.2    | 0.17  | 450  | 8x10.2    | 0.39  | 300 |
| 150         | 6.3x6.0   | 0.44  | 230  | 6.3x6.0   | 0.44  | 230  | 6.3x7.7   | 0.34  | 280  | 8x10.2    | 0.17  | 450  | →         |       |      | 10x7.7    | 0.17  | 450 |
| 220         | 6.3x6.0   | 0.44  | 230  | 6.3x7.7   | 0.34  | 280  | 6.3x7.7   | 0.34  | 280  | 8x10.2    | 0.17  | 450  | 8x10.2    | 0.17  | 450  | 10x10.2   | 0.21  | 450 |
| 330         | 6.3x7.7   | 0.34  | 280  | 8x10.2    | 0.17  | 450  | 8x10.2    | 0.17  | 450  | 8x10.2    | 0.17  | 450  | 10x10.2   | 0.090 | 670  | 12.5x13.5 | 0.14  | 620 |
| 390         |           |       |      | →         |       |      | 10x7.7    | 0.17  | 450  |           |       |      |           |       |      |           |       |     |
| 470         | 8x10.2    | 0.17  | 450  | 8x10.2    | 0.17  | 450  | 8x10.2    | 0.17  | 450  | 10x10.2   | 0.090 | 670  | 12.5x13.5 | 0.066 | 900  |           |       |     |
| 680         | 8x10.2    | 0.17  | 450  | →         |       |      | 10x10.2   | 0.090 | 670  |           |       |      | 12.5x13.5 | 0.066 | 900  |           |       |     |
| 1000        | 8x10.2    | 0.17  | 450  | 10x10.2   | 0.090 | 670  |           |       |      | 12.5x13.5 | 0.066 | 900  |           |       |      | 16x16.5   | 0.078 | 790 |
| 1500        | 10x10.2   | 0.090 | 670  |           |       |      | 12.5x13.5 | 0.066 | 900  |           |       |      | 16x16.5   | 0.052 | 1250 |           |       |     |
| 2200        |           |       |      | 12.5x13.5 | 0.066 | 900  |           |       |      | 16x16.5   | 0.052 | 1250 |           |       |      |           |       |     |
| 3300        | 12.5x13.5 | 0.066 | 900  |           |       |      | 16x16.5   | 0.052 | 1250 |           |       |      |           |       |      |           |       |     |
| 4700        |           |       |      | 16x16.5   | 0.052 | 1250 |           |       |      |           |       |      |           |       |      |           |       |     |
| 6800        | 16x16.5   | 0.052 | 1250 |           |       |      |           |       |      |           |       |      |           |       |      |           |       |     |

→Use next higher voltage product.  
Please refer to page 15 for the ripple current frequency coefficient.

Case size:  $\phi D \times L$  (mm)  
10x7.7:CE-AXA  
16x16.5:CE-AXT

Rated ripple current  
mA<sub>RMS</sub>(100kHz, 105°C)  
Impedance( $\Omega$ )  
max at 100kHz, 20°C

■ Model No.

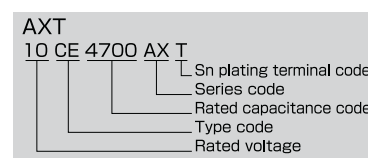

CE-BE

CE-BD

CE-BS

CE-BSS

CE-FE

CE-LD

CE-FU

CE-FS

CE-FSS

CE-FH

CE-GA

CE-AX

CE-KX

CE-LX

CE-LS

CE-LH

CE-LL

CE-PC

CE-PH

CE-PF

CE-NP

CE-FN

ME-SWB

ME-UZ·SZ

ME-UAX·SAX

ME-SWG

ME-LS

ME-HC

ME-CZ

ME-CA

ME-CX

ME-AX

ME-WX

ME-WA

ME-WL

ME-WG

ME-PX

ME-HPC·HPD

ME-FC·FD

ME-FAZ

ME-FH

ME-SWN

ME-HWN